

## CORNER RECORD

COUNTY OF Plumas T. 27 N R. 12 E Mt. Diablo MERIDIAN CALIFORNIA  
 CORNER TYPE: GOVT. CORNER  MEANDER  RANCHO  CONTROL  OTHER   
 CORNER IDENTIFICATION — DATE OF VISIT 10/06/98 revisit  
10-15-97  
 26-25

CORNER — LEFT AS FOUND  FOUND AND TAGGED  REESTABLISHED OBLITERATED CORNER  REBUILT

## PHYSICAL DESCRIPTION OF CORNER FOUND; EVIDENCE AND METHOD USED TO IDENTIFY OR REESTABLISH

## GLO Notes 1878

Set fir post 3 x 3 x 50 inch in stone mound  
 Pine 8" dia. Bears N 60°W, 37 links(24.4 ft.)  
 Fir 10" dia. Bears S 62° E, 84 links(55.4 ft.)


## Found

1 & 1/2" iron pipe with DWR brass cap in mound of rocks with paddle board  
 Pine 34" dia. Bears N 75°W, 25 ft. with unreadable scar  
 Decaying stump S 62° E, 55 ft.

## PHYSICAL DESCRIPTION OF MONUMENTS REBUILT OR PERPETUATED

CALIFORNIA COORDINATE SYSTEM ORDER: FIRST  SECOND  THIRD   
 STATIONS USED: NGS (USC & OS)  STATE  COUNTY  OTHER  STATION \_\_\_\_\_ STATION \_\_\_\_\_  
 ZONE \_\_\_\_\_ ELEVATION \_\_\_\_\_ NORTHINGS (Y) \_\_\_\_\_ EASTINGS (X) \_\_\_\_\_

## SKETCH: (Include reference tie or witness points, remarks and topo of area)

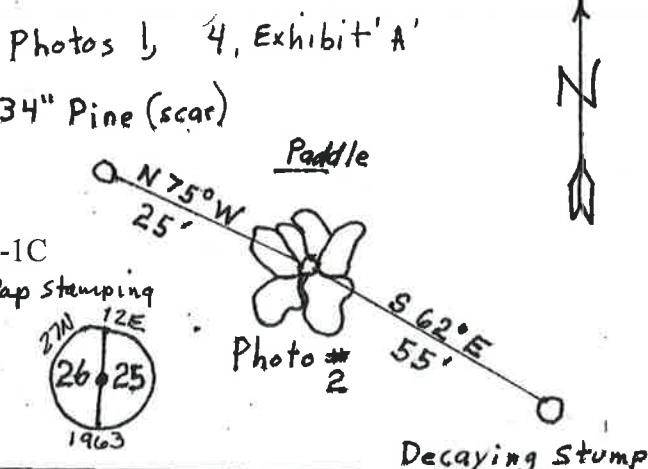


Attached: Exhibit 'A' Photos


References: (1) \* GLO notes  
 (2) Antelope Lake Quadrangle Map 604-1C

\* indicates that a copy is included

SURVEYOR'S CERTIFICATE  
 THIS CORNER RECORD WAS PREPARED BY ME OR UNDER MY  
 DIRECTION IN CONFORMANCE WITH THIS LAND SURVEYOR'S ACT  
 ON October 22, 1998

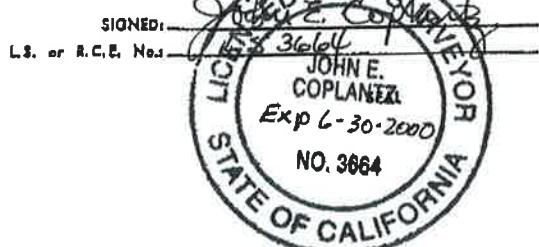

COUNTY SURVEYOR'S CERTIFICATE  
 THE CORNER RECORD WAS RECEIVED 10/20/98  
 AND EXAMINED AND FILED 11/2/98  
 BY: Tom Stump

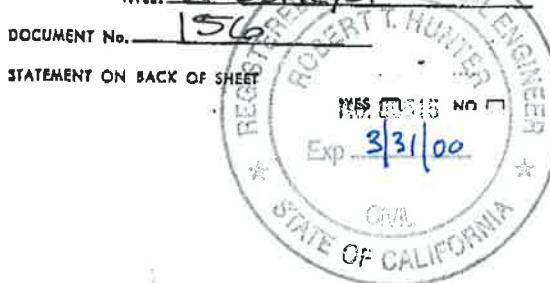

#156



#1 34" PINE WITH SCRIBE



#2

EXHIBIT 'A'  
EAST  $\frac{1}{4}$  OF SECTION 26  
T 27 N R 12 E M.D.M.

#3 AREA VIEW



#4

80.14 Intersect the east boundary at a point 16 links north of the corner to sections 30, 31, 25 and 36, which corner is a granite stone 16x12x10 in a stone mound, from which a, pine 20 inch diam. bears N.39°E. 62 links dist. pine 28 inch diam. bears S.42½°W. 70 links dist. pine 24 inch diam. bears N.64°W. 105 links dist. pine 36 inch diam. bears S.48½°E. 89 links dist. From which corner I run, N.89°53'W. on a true line.

Var. 17° east.

40.07 Set a granite stone 18x14x3 in a stone mound for quarter section corner, from which a, pine 12 inch diam. bears S.6°E. 57 links dist. 37.62' pine 16 inch diam. bears N.29°W. 90 links dist. 59.40' 80.14 To corner to sections 25, 26, 35 and 36. Land mountainous.  $5\frac{1}{4}$  Sec 25 Soil second rate. Heavy timber pine, cedar and fir. Undergrowth same with manzanita.

-----  
N.1°26'E. between sections 25 and 26.

Var. 16° 30' east.

40.00 Set a fir post 3x3x50 inch in a stone mound for quarter section corner from which a, pine 8 inch diam. bears N.60°W. 37 links dist. FIR 10 inch diam. bears S.62°E. 84 LKS,

- 4 -

Reference #1