


BASIS OF BEARING
 The West line of Parcels 1, 2 and 4 of 6 P.M. 44, shown as S 3° 29' 38" E

LEGEND
 ○ = Set 1/2" capped rebar, LS 2843
 ● = Found point as noted, per 4 P.M. 103
 (M) = Measured
 (R) = Record per 4 R.S. 142
 (R-1) = Record per 4 P.M. 103

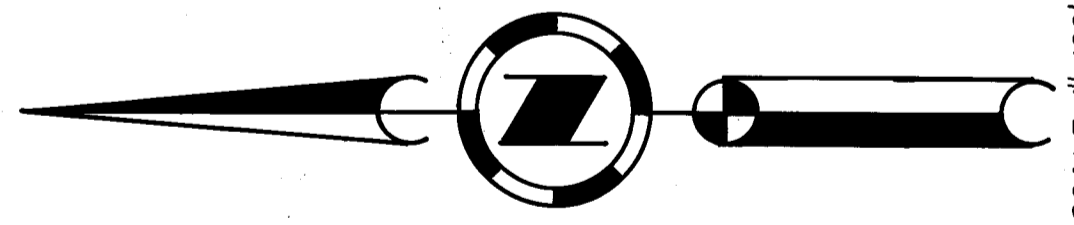

Found Monuments and Accessories are as Described on 4 R.S. 142

Fd. 3/4" I.P., open per 4 P.M. 103
 N 56° 03' 40" E, 15.76
 N.W. Cor. of S.W. 1/4 of N.E. 1/4 of Sec. 15

Fd. 1/2" rebar and cap, LS 3297 per 6 P.M. 44 from computed N.E. cor. of E. 1/2 of S.W. 1/4 of N.E. 1/4, N 15° 19' 14" E, 6.47

Fd. 1/2" rebar and cap, RCE 11173
 S 45° 55' 48" W, 12.60 (M)
 S 41° 53' 48" W, 13.57 (R-1)

Fd. 1/2" rebar and cap, LS 3297 per 6 P.M. 44
 N 25° 31' 14" E, 2.15 from computed S.E. corner of E. 1/2 of S.W. 1/4 of N.E. 1/4

Fd. 3/4" I.P., open per 4 P.M. 103
 N 69° 00' 40" E, 34.88 from computed corner per 4 P.M. 103

Fd. 1/2" rebar and cap, number illegible
 N 89° 57' 43" W, 288.69 (M)

Fd. 3/4" I.P., open, set tag LS 2843
 N 63° 51' 48" E, 26.10

Fd. 1/2" rebar and cap, RCE 11173
 N 8° 57' 00" W, 1157.79 (R-1)
 S 14° 12' 25" E, 1158.45 (M)

Fd. 1/2" rebar and cap, RCE 11173
 N 89° 07' 58" E, 1327.64

Center of Section 15

Fd. 2" I.P. with B.L.M. Brass Cap and B.T.'s
 Scribed 14" Pine, S 15° E, 25 Lks
 Scribed 16" Pine, S 84° W, 40 Lks
 Scribed 16" Pine, N 47° W, 30 Lks
 Remains of pine stump with U.S.F.S. B.T. tag, S 45 1/2° W, 12.4.5 Lks.
 32" Pine, closed blaze, tags, N 38° E, 112.5 Lks.

Fd. 2" I.P. with B.L.M. Brass Cap and B.T.'s
 Old stump with F.S. tag, N 21° E, 22 Lks.
 Scribed 10" Cedar, N 72° W, 14 Lks.
 Scribed 10" Cedar, S 72° E, 40 Lks.

Fd. 2" I.P. with B.L.M. Brass Cap and B.T.'s
 Scribed 10" Cedar, N 89° 03' 45" W, 2678.51 (M)
 Scribed 16" Pine, S 80° W,

Fd. 2" I.P. with B.L.M. Brass Cap and B.T.'s
 Scribed 10" Cedar, N 20° W, 67 Lks., tags
 Scribed 16" Pine, S 80° E, 37 Lks.

Fd. 2" I.P. with B.L.M. Brass Cap and B.T.'s
 Scribed 10" Cedar, N 44° E, 26.5', 0.57 D.B.H.
 Cedar, N 44° E, 26.5', 0.57 D.B.H.

Fd. Stone per 4 R.S. 142, accepted as corner
 Fd. Capped Rebar, LS 3297, S 7° 45' 20" W, 1.10
 Fd. Slump hole, N 26° W, 77 Lks.
 Fd. 1/2" steel pin as replacement for rotted tree, LS 3297
 S 40° W, 51 Lks., per 4 R.S. 142
 Pitch pine, N 18° W, 40.0', 0.92 D.B.H.
 Cedar, N 44° E, 26.5', 0.57 D.B.H.

2" I.P. with B.L.M. Brass Cap and B.T.'s
 Down 19" Pine snag, Blaze, 1/4 scribe
 N 61 1/2° E, 121 Lks.
 Scribed 25" Cedar, S 83° W, 35 Lks.
 Scribed 12" Pine, N 29° E, 35 Lks.
 Scribed 12" Pine, N 29° E, 35 Lks.

Fd. 1/2" Capped pin, LS 3297, and B.T.'s
 Fd. Slump hole, N 71 E, 109 Lks.
 Downed tree with blaze, N 71° E, 123 Lks.
 Pitch Pine, S 56° 30' E, 35 Lks., 0.82' D.B.H.

2593.77 (M) 2580.73 (R)
 5249.05 (M) 5246.78 (R)
 2654.51 (M) 2648.82 (R)
 N 88° 02' 41" E (R)
 N 88° 19' 34" E (M)

2750.38 (M) 2728.55 (R)
 N 89° 07' 38" E (M) N 89° 15' 16" E (R)

S 3° 13' 38" E 2626.21 (M)
 SOUTH 40.00 (G.L.O.)
 N 3° 15' 09" W 2623.22 (R)

S 5° 56' 29" E 2636.74 (M)
 S 2° 42' E 40.16 CH. (G.L.O.)
 N 5° 56' 41" W 2640.80 (R)

2666.83 (R) 2663.78 (M)
 2666.83 (R) 2663.78 (M)
 1330.37 (M) 1330.37 (M)
 1333.41 (R) 1333.42 (R)
 1333.02 (R) 1333.03 (R)
 1327.64 (M) 1327.64 (M)
 2655.28 (M) 2666.05 (R)
 N 4° 19' 55" W (M) N 4° 15' 18" W (R)

2670.44 (R) 2669.83 (M)
 1334.92 (M) 1334.92 (R)
 1334.92 (M) 1334.92 (R)
 2599.73 (R) 1299.87 (R)
 N 89° 06' 08" E 649.15 (M)
 N 88° 56' 12" E 649.94 (R)
 N 88° 56' 12" E 649.94 (R)
 N 88° 56' 12" E 649.94 (R)
 N 88° 56' 12" E 649.94 (R)
 N 88° 56' 12" E 649.94 (R)
 N 88° 56' 12" E 649.94 (R)

2669.50 (R) 2668.24 (M)
 N 1° 12' 49" W 1334.12 (M)
 N 1° 10' 12" W 1334.75 (R)
 1334.12 (M) 1334.75 (R)
 1334.12 (M) 1334.75 (R)
 1334.12 (M) 1334.75 (R)
 1264.52 (R) 1261.70 (M)
 2559.04 (R) 5248.59 (R)

RECORD OF SURVEY
 FOR
SERGIO ORSOLINI
 IN A PORTION OF THE N.E. 1/4 OF SEC. 15,
 T. 22 N., R. 13 E., M.D.B. & M.
 PLUMAS COUNTY, CALIFORNIA

SURVEYOR'S STATEMENT
 This map correctly represents a survey made by me or under my direction in conformance with the requirements of the Land Surveyors Act at the request of Sergio Orsolini on June, 1985.

John W. Hamby LS 2843

COUNTY SURVEYOR'S STATEMENT
 This map has been examined in conformance with Section 8766 of the Land Surveyors Act this 10th day of September, 1985.

Lawrence J. Brock
 Plumas County Surveyor
 Lawrence J. Brock, RCE 13528

RECORDERS CERTIFICATE
 Filed this 10th day of September, 1985, at 2:50 P.M. in Book 7 of Records of Surveys at Page 47 at the request of the County Engineer.

Fee \$ 5.00
 File No. 1464

Ila Diggs
 Plumas County Recorder

Patricia Lacey
 Deputy Plumas County Recorder

HAMBY SURVEYING INC.
 Portola, California
 P.O. Box 842
 (916) 832-5571