SURVEY HISTORY

RANGE LINE AND SECTION LINES ENCOMPASSING SECTION 19 WERE SURVEYED BY A.W. KEDDIE IN AUGUST 1871.

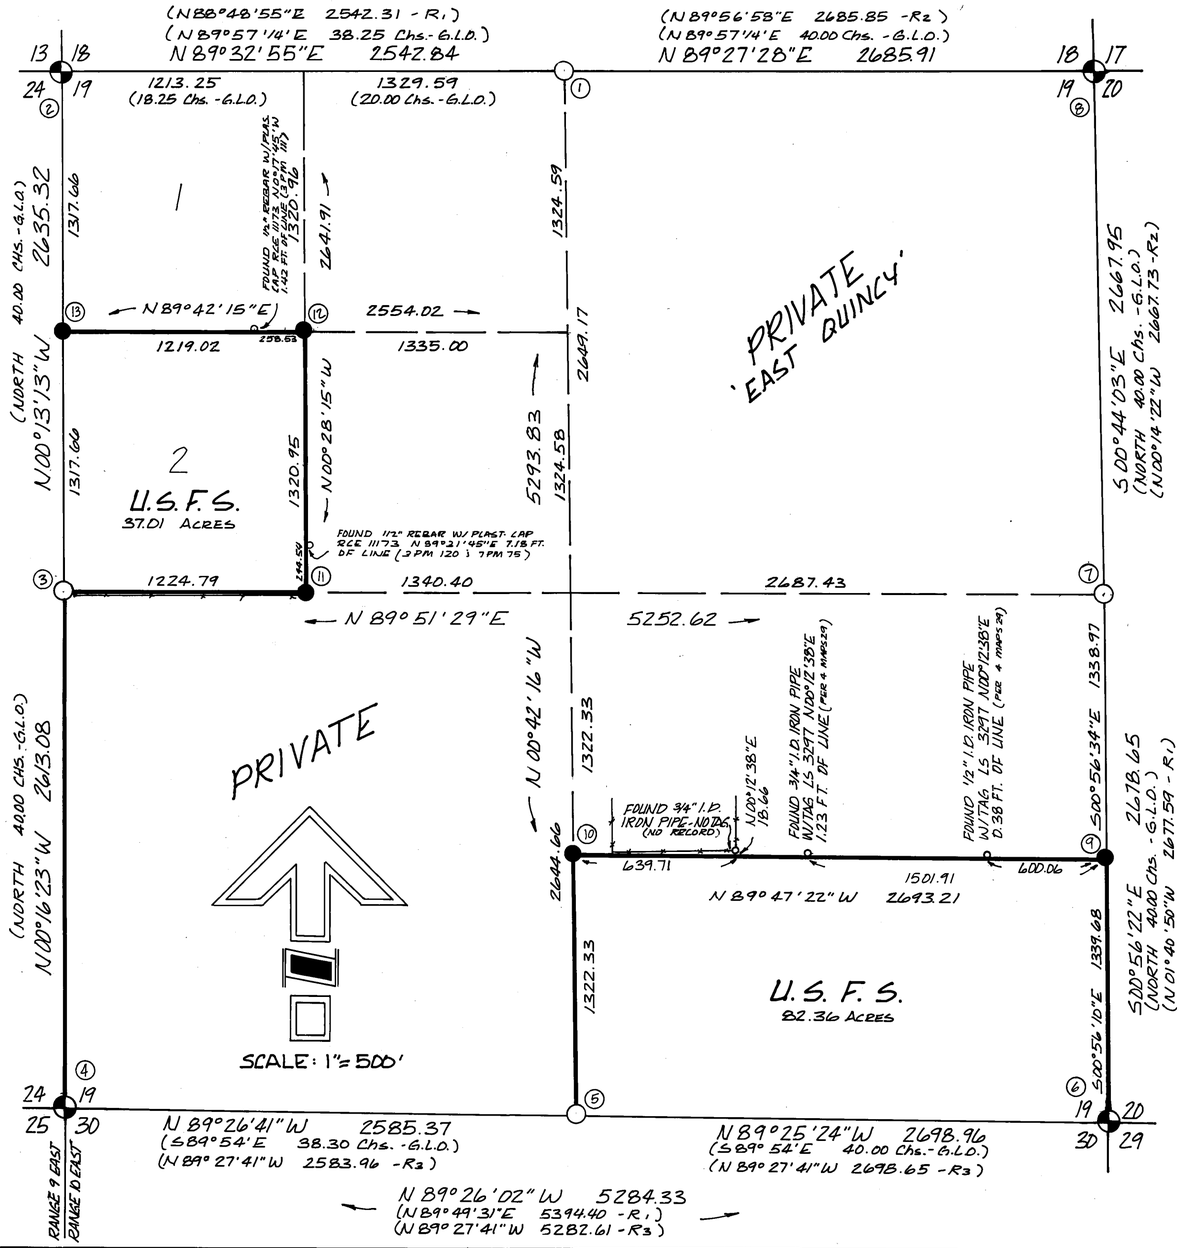

CORNER NOTES

(1) FOUND 8" x 8" x 6' WOOD FENCE POST W/ BRASS TAG RCE 22836; ACCEPTED AS 1/4 CORNER BASED UPON REPUTATION AND RELATIVE FIT TO CERTAIN TOPO CALLS. NO BT'S.
FROM WHICH:
A 5/8" x 2' ALUM. DRIVE-IN MONUMENT W/ 3 1/2" ALUM. CAP BEARS N 32 1/4°W 2.0 FT. STAMPED:
A 3/4" REBAR AT OLD FENCE CORNER BEARS S 00°45'W 99.6 FT. (SW COR. 7 DEEDS 704)
A 5/8" x 2' ALUM. DRIVE-IN MONUMENT W/ 3 1/2" ALUM. CAP BEARS S 36°W 1.7 FT. STAMPED:

(2) FOUND 1" HEX NUT ON 5/8" BOLT W/ BRASS TAG RCE 12528; ACCEPTED AS SECTION CORNER BASED UPON REPUTATION AND RELATIVE FIT TO CALLS AND CORNERS TO THE SOUTH ALONG RANGE LINE, NO BT'S; REPLACED WITH 5/8" x 3' DRIVE-IN ALUM. ROD WITH 3 1/2" ALUM. CAP STAMPED:
FROM WHICH:
A 5/8" x 2' DRIVE-IN ALUM. ROD WITH 3 1/2" ALUM. CAP BEARS N 43°00E 5.00 FT.
A 5/8" x 2' DRIVE-IN ALUM. ROD WITH 3 1/2" ALUM. CAP BEARS S 44° 29'E 5.00 FT.

(3) NOTHING FOUND AT CORNER POSITION. SCATTERED ROCK MOUND FOUND DOWNHILL ± 4.5 FT. AGAINST TREE. FOUND BOTH ORIGINAL BEARING TREES. SET ACAP:
FROM WHICH:
16" B.OAK BEARS S 24°E 3.3 FT. (6 L.D. - S 24°E 5 LKS.); CUT AND FOUND SCRIBING AND REVERSE SCRIBING "BT" 5" INTO TREE.
12" B. OAK BEARS S 31°W 14.2 FT. (15.8 SLOPE) (CALC. - S 31 1/2°W 24 LKS.); CUT AND FOUND AXE MARKS, CHAINING NOTCH AND REVERSE SCRIBING "4" AND "BT".
(NEW) 8" D. FIR BEARS N 54°W 14.7 FT. MARKED "1/4 S 24 BT"
(NEW) 7" D. FIR BEARS N 59°E 16.7 FT. MARKED "1/4 S 19 BT"
1/2" I.D. IRON PIPE W/TAG RCE 13528 IN M.O.R. BEARS N 46°42'34"E 4.53 FT. (3 R.S. 144)

(4) FOUND 3 1/2" ACAP IN M.O.R. PER 6 R.S. 65
FROM WHICH:
± 32" D. FIR STUMP BEARS N 72°E 38.9 FT. (6 L.D. - N 68 1/2°E 85 LKS.) (N 71°19'E 58.2 FT. - R1)
6" D. FIR MKD. "X" "NBT" BEARS S 43°W 21.6 FT. (S 45°W 21.8 FT. - R2)
7" D. FIR MKD. "X" "NBT" BEARS N 36°W 18.3 FT. (N 35°W 18.3 FT. - R3)
6" CEDAR MKD. "X" "NBT" BEARS N 62°E 10.1 FT. (N 62°E 10.2 FT. - R3)
17" D. FIR MKD. "T24N R10E S... NBT" BEARS S 85°E 4.1 FT. (16" FIR S 85°E 4.1 FT. - R3)

(5) ORIGINAL EVIDENCE NOT FOUND. ACCEPTED CORNER POSITION PER 6 R.S. 66 (PRORATE POSITION)
FROM WHICH:
A 3 1/2" ACAP BEARS S 89°26'41"E 9.0 FT. (S 89°27'41"E 9.0 FT. - R2) STAMPED:
WITNESS CORNER BT'S:
7" D. FIR "BT" VISIBLE BRS. N 48°E 24.6 FT. (N 48°E 24.5 FT. - R3)
15" D. FIR "BT" VISIBLE BRS. S 37°E 55.6 FT. (S 37°E 55.5 FT. - R3)
1/2" I.D. IRON PIPE W/TAG RCE 13528 BEARS S 89°34'06"E 72.27 FT. (S 89°27'41"E 71.7 - R3)

(6) FOUND 3 1/2" ACAP IN M.O.R. PER 6 R S 65 STAMPED
FROM WHICH:
35" PINE STUMP BEARS N 20 1/4°E 32.8 FT. (G.L.O. - N 24°E 56 LKS.) (N 19°22'E 31.7 FT. - R1)
DEAD 12" B. OAK BEARS N 67°W 42.8 FT. (6 L.D. - N 60 1/4°W 62 LKS) (N 66°30'W 43.3 FT. - R1)
13" W. FIR MKD. "T24N RIDE S 30 NBT" BEARS S 53°W 10.1 FT (S 54°W 10.2 FT. - R3)
12" D. FIR MKD. "T24N R10E S20 NBT" BEARS N 74°E 16.3 FT. (S 75°E 16.4 FT. - R3)
7" D. FIR MKD. "X" "NBT" BEARS N 17°W 24.7 FT. (N 13°W 24.8 FT. - R2)

(7) FOUND 1 1/2" SQ. BOLT HEAD ON 3/4" BOLT; ACCEPTED AS 1/4 CORNER BASED UPON REPUTATION AND RELATIVE FIT TO TOPO CALLS, NO BT'S. REPLACED WITH ACAP STAMPED:
FROM WHICH:
A 5/8" x 2' ALUM. DRIVE-IN ROD WITH 3 1/2" ALUM. CAP BEARS S 86°39'W 5.00 FT.
A 5/8" x 2' ALUM. DRIVE-IN ROD WITH 3 1/2" ALUM. CAP BEARS S 13°30'E 5.00 FT.
± 38" ROTTED STUMP BRS. N 00°35'W 141.0 FT. POSSIBLE LINE TREE (NORTH 2.11 Chs.)

(8) FOUND 1/2" REBAR WITH PLASTIC CAP RCE 22836. ACCEPTED AS SECTION CORNER BASED UPON BEST AVAILABLE LOCATION (DOUBLE PRORATE PER 5 R.S. 91). APPROX. NORTH CORNER OF OLD LEE AND MOSES' BARN BEARS WEST 6.34 FT. (WEST 9.50 Chs. - 6 L.D.), NO BT'S; FROM WHICH:
A 3 1/2" ACAP 1' WEST OF NORTH-SOUTH FENCE BEARS N 69°01'E 82.9 FT.
A 5/8" x 2' ALUM. DRIVE-IN ROD WITH 3 1/2" ALUM. CAP BEARS S 22°07'E 179.7 FT.

(9) FOUND 3/4" I.D. IRON PIPE W/TAG (UNREADABLE). REPLACED WITH 3 1/2" ACAP STAMPED:
FROM WHICH:
16" D. FIR BRS. WEST 10.9 FT. MKD. "S 1/16 S 19 BT"
12" W. FIR BRS. N 38°E 15.1 FT. MKD. "S 1/16 S 20 BT"

(10) SET 3 1/2" ACAP STAMPED:
FROM WHICH:
8" D. FIR BRS. S 89°W 16.4 FT. MKD. "CS 1/16 S 19 BT"
6" D. FIR BRS. S 20°E 20.2 FT. MKD. "CS 1/16 S 19 BT"
OLD STONE MOUND BEARS N 60 1/2°W 18.70 FT. (1920)

(11) SET 3 1/2" ACAP STAMPED:
FROM WHICH:
7 1/2" W. FIR BRS. N 49°W 13.1 FT. MKD. "CW 1/16 S 19 BT"
11" D. FIR BRS. S 41°W 31.1 FT. MKD. "CW 1/16 S 19 BT"
1/2" REBAR W/ PLAST. CAP RCE 11173 BRS. N 65°12'E 9.31 FT. (PER 3 PM 111)

(12) SET 3 1/2" ACAP STAMPED:
FROM WHICH:
6 1/2" B. OAK BRS. S 89°W 25.3 FT. MKD. "N W 1/16 S 19 BT"
17" D. FIR BRS. S 04°W 33.8 FT. MKD. "NW 1/16 S 19 BT"
1/2" REBAR W/ PLAST. CAP (BENT) RCE 11173 BRS. N 78°16'E 9.13 FT.
1/2" REBAR W/ PLAST. CAP RCE 11173 BRS. N 89°21'W 99.40 FT. (PER 3 PM 111)

(13) SET 3 1/2" ACAP STAMPED:
FROM WHICH:
11" D. FIR BRS. S 64°E 13.1 FT. MKD. "N 1/16 S 19 BT"
6" D. FIR BRS. S 01°W 12.5 FT. MKD. "N 1/16 S 24 BT"
1/2" REBAR W/ PLAST. CAP RCE 11173 BRS. S 67°36'E 1.68 FT.
1/2" REBAR W/ PLAST. CAP RCE 15265 BRS. N 59°19'E 2.77 FT. (PER 6 R.M. 1)

LEGEND

- ○ ● CORNER FOUND OR SET AS NOTED
- REPRESENTS SURVEYED, MARKED AND POSTED BOUNDARY
- (R1) RECORD DATA PER 3 R.S. 144
- (R2) RECORDED DATA PER 5 R.S. 91
- (R3) RECORD DATA PER 6 R.S. 65
- (3) KEY TO CORNER NOTES
- DIMENSION LINE
- FENCE LINE
- M.O.R. MOUND OF ROCKS
- ACAP 2" X 30" ALUM. PIPE MONUMENT WITH 3 1/2" ALUM. CAP AND PLASTIC BASE MANUFACTURED BY EITHER BERNSTEN OR SURVKAP

BASIS OF BEARINGS

THE BASIS OF BEARINGS FOR THIS SURVEY IS TRUE NORTH AS DETERMINED BY SOLAR OBSERVATION USING THE ALTITUDE METHOD NEAR THE NORTH 1/4 CORNER OF SECTION 19. LATITUDE 39°56'08". (AUG. 16, 1985)

SURVEYOR'S STATEMENT

THIS MAP CORRECTLY REPRESENTS A SURVEY MADE BY ME OR UNDER MY DIRECTION IN CONFORMANCE WITH THE REQUIREMENTS OF THE LAND SURVEYORS' ACT AT THE REQUEST OF THE PLUMAS NATIONAL FOREST IN JUNE, 1985.

Mark D. Filsinger
MARK D. FILSINGER LS 4976

COUNTY SURVEYOR'S STATEMENT

THIS MAP HAS BEEN EXAMINED IN ACCORDANCE WITH SECTION 8766 OF THE LAND SURVEYORS' ACT THIS 30TH DAY OF September 1985.

Lawrence J. Brock
LAWRENCE J. BROCK R.C.E. 13528
PLUMAS COUNTY SURVEYOR

RECORDER'S CERTIFICATE

FILED THIS 30TH DAY OF September, 1985, AT 2:42 P.M. IN BOOK 7 OF RECORD OF SURVEYS AT PAGE 50, AT THE REQUEST OF THE COUNTY ENGINEER.

FEE $5.00
FILE No. 2269

ILA DIGGS
PLUMAS COUNTY RECORDER
BY Bob Cammack
DEPUTY

RECORD OF SURVEY

FOR

THE PLUMAS NATIONAL FOREST

LOCATED IN SECTION 19, TOWNSHIP 24 NORTH, RANGE 10 EAST, M.D.M., PLUMAS CO., CALIFORNIA.

MARK D. FILSINGER
LAND SURVEYOR

P.O. BOX 3109
QUINCY, CALIF. 95971

499 BELL LANE
(916) 283-0154

AUGUST 1985

SHEET 1 OF 1